




BUBBLES
INSULATION

DUOREFLEX

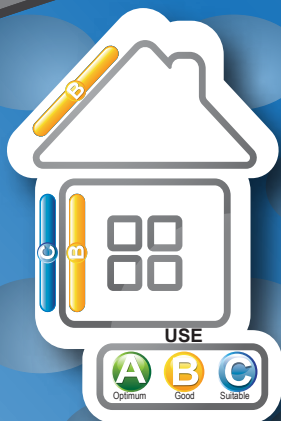

TECHNICAL CHARACTERISTICS

Dimensions	12,5 x 1,2 m
Surface	15 m ²
Weight (roll)	+/- 5,1 kg
Thermal conductivity (λ)	0,037 W/(m.K)
Weight (to the m ²)	+/- 341 g/m ²
Thickness	+/- 6 mm
Resistance to water penetration	W1



Non toxic




Sealed
air and water



Does not attract
rodents

COMPOSITION

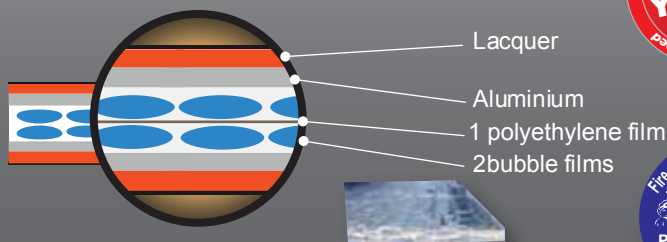

USE

Must not be laid near a source of direct heat or flame, for example chimney, a fireplace, around a bushel, boiler hot pipes etc... For such applications you should use insulation classified fireproof.

QUICK AND EASY INSTALLATION



MEASURE



CUT



STAPLE



TAPE

Compatible
tape



ADHER'ALU
(M1)



Made in
France

rouleau de
15 m²



www.xlmat.com

REFLECTIVE INSULATION



3 760088 084015

697, Route des Chênes - 73200 GILLY-SUR-ISÈRE - FRANCE - Tél.: (+33)4 79 37 54 40 - e.mail : contact@xlmat.fr